

抗金属防伪超高频硬标签

On Metal Use Tamper Proof UHF Hard Tag




基本参数/Basic Parameters

| | |
|---------------------------|---|
| 尺寸/Size (L/OD x W/ID x H) | 133*38*16mm(ID/OD:圆形标签内径/外径,ID/OD:inner/outer diameter of round tags) |
| 面材封装/FaceStock or Housing | 塑料外壳/ABS Plastic Housing |
| 安装方法/Installation | 捆扎/卡扣/锁扣型/Tie up,tight up,Inserting or Locking Style |
| 天线工艺/Antenna Type | 铝天线/Aluminum Antenna |
| 技术/Technology | 平面微带/Microstrip Flat Style |
| 离型纸/Backing Liner | 无/None |
| 特征/Characters | 防伪(Tamper Proof)/抗金属(On Metal Use) |


产品特性/Product Feature

| | |
|--------------------------|--|
| 芯片/Chip Model | G2L+ |
| 协议/Protocol | ISO18000-6C GEN2 |
| 频率范围/Operating Frequency | 860-960Mhz |
| 内存/Memory | TID/UID 64bit+ EPC/Block 128bit+ User 0bit+ Reserve 32bits access Password and 32bits kill password |
| 读距/Reading Range | 600cm (depends on reader) |
| 应介质/Applicable Surface | 空气(Air-free)/金属(On metal)/塑料(Plastic) |
| 个性化选项/Option | 定制彩色印刷条码文本或个性化编码Custom color printing(Embossing or laser-engraving) with barcode or text & personalization encoding |
| 附加说明/Additional | Due to reading range consideration, Please don't insert the wire too much longer out of the plastic body,otherwise it will reduce reading distance 考虑到读距问题，钢丝铅封以后钢丝长度不宜超出塑料壳体过长，否则会导致读取距离下降。 |

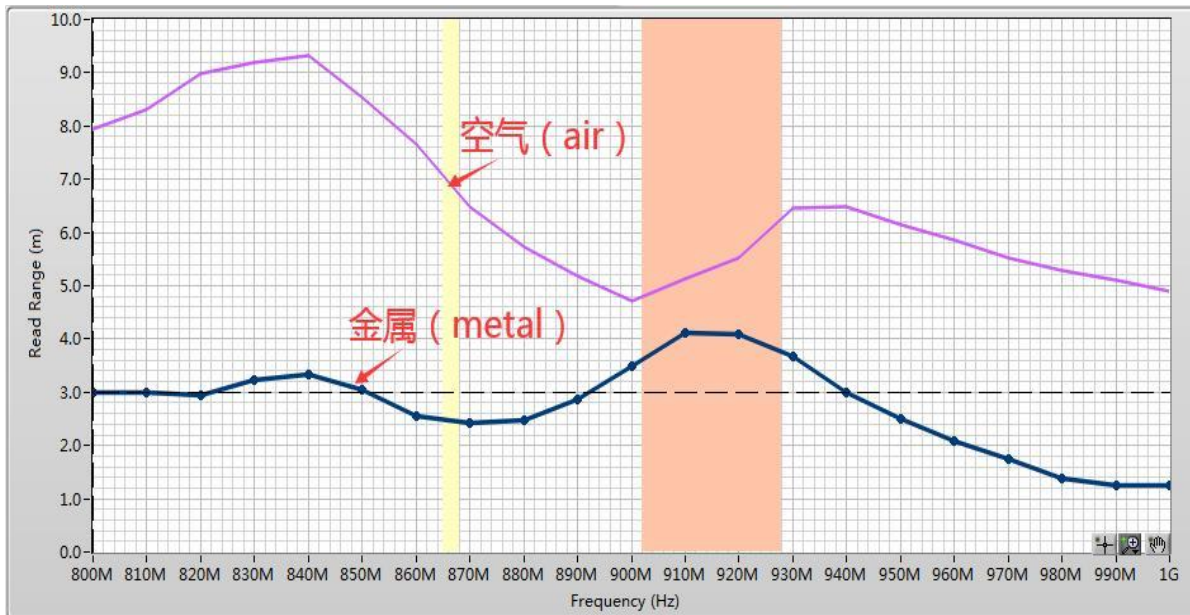

供货方式/Delivery & Supply Format

单片/单个/单张供货每袋50-200片/张(特殊要求见附加说明) Supply in piece or sheet with 50-200pcs per box(Check Additional Note for your specific request)

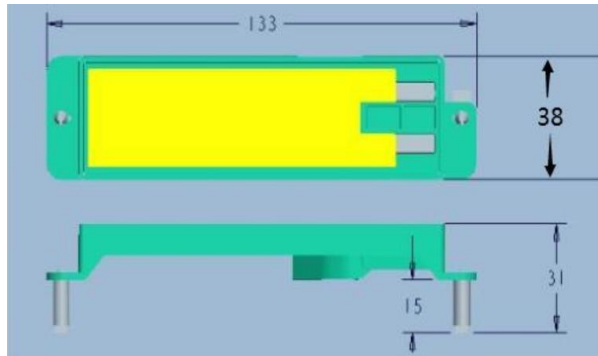

应用场景/Application

塑料扎带型标签可广泛应用于物流中转箱封口, 包装箱封, 集装箱、货架、设备仪器标识、医疗器械登记、固定资产、模具治具、零配件、化学药品、农副食品、动物管理领域, 以实现产品的标识、跟踪、及溯源查询或监管, 包括物流供应链、数字化仓储、溯源监管, 以及相关涉密物品或涉隐私产品的封箱运输等。Plastic Ribbon Tie tag seal mainly used for sealing package of boxes, containers, components, industry spare parts, mould tooling, spare parts, chemical, pesticide, food, animal and so on with products identification, tracking including supervision management, logistics supply chain, digital warehousing, source traceability, even more sealing for related security items and confidential goods for the person.



环境参数/Environmental Parameter

| | |
|----------------------------|------------------------------|
| 数据保存/Data EEPROM Retention | 10years |
| 静电保护/ESD Limited Voltage | 2KV |
| 工作温度/Operating Temperature | -35℃ - 85℃ |
| 储存温度/Storage Temperature | 0℃ - 25℃ |
| 操作湿度/Relative Humidity | 10%-95%(Variant Performance) |

声明/STATEMENT

上述数据是基于本公司对产品特性的一般了解, 仅供一般信息参考。客户购买本产品时应在实际应用条件下测试结果来自行决定是否适用。英诺尔向购买者保证其产品在材料和工艺上没有不良。The above data is based on our company general understanding of the product attribute, is just for general reference. Buyer should evaluate product under the condition of practical application to decide whether it is suitable for your application. XMinnov guarantee their products to the buyers that there is no defect on product material and fabrication.

批准Approved By: 林鸿伟
日期Date: 2022/03/23

制作审核Prepared & Checked By: 林阿霞
日期Date: 2022/03/23